




MVE 41/3E-MICRO [EE20004100A0JA0000]

3 PH - 2 poles - 3000 RPM - 400 V [3PH] - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power Factor	Ia/In
0,9	0,45	45	400 [3PH]	0,06	0,18	0,44	

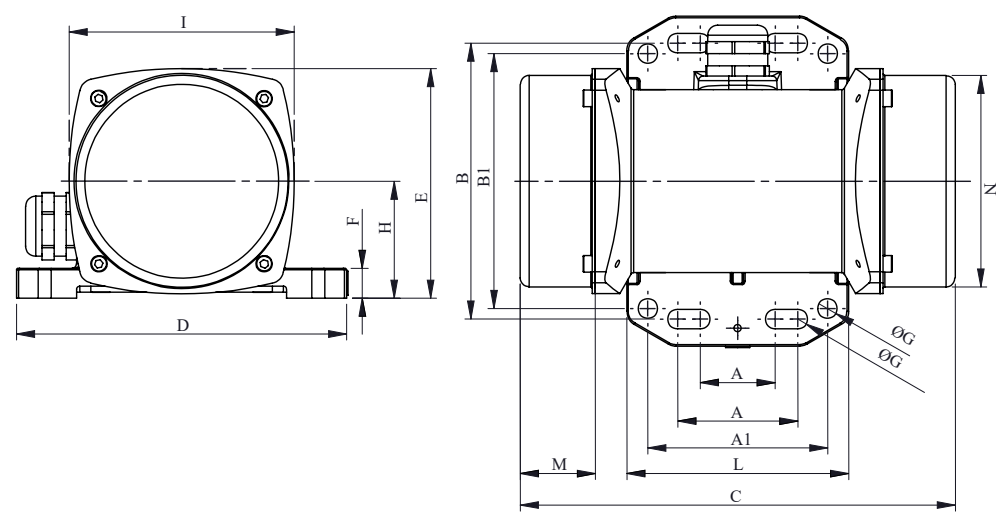

OVERALL DIMENSIONS [mm]																
Weight [Kg]	A	A 1	B	B 1	G	Holes number	C	D	E	F	H	I	L	M	N	
2,4	25-40	60	92	85	6,5	4	161	110	76	10	39	75	74	33	70	

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	Yes	M6	6,5 x 10 mm	5	4Gx0.75 80°C	M16 80°C

BEARINGS			
Type	Life 100%	Life 80%	Life 50%
6200 2Z	37027	/	/

CERTIFICATION	
ATEX II2 D Ex tb IIIC T135°C Db IP66 IECEX Ex tb IIIC T135°C Db IP66 CLASS II DIV.2 GROUP F,G T4 Ex tb IIIC Tx Db IP66 CONF.TO UL1004-3, UL1004-1,UL 60079-0,UL60079-31 CERT. CSA C22.2 No.100,CSA C22.2 No.77, CSA C22.2N.60079-0,CSA C22.2N.60079-31 T.Amb -20/+40°C	 